

T28 Ø35mm TWO WAY SOFT-CLOSING INDIVISIBLE THICK DOOR HINGEE

35杯两段力缓冲固装厚门铰链



- 开启角度: 95度
- 铰杯厚度: 11.6毫米
- 铰杯直径: 35毫米
- 面板(K)尺寸: 3毫米-7毫米
- 材质: 铁镀镍
- 门可选用板厚: 15毫米-28毫米
- Opening angle: 95°
- Depth of hinge cup: 11.6mm
- Diameter of hinge cup: 35mm
- Drilling distance on the door(K): 3-7mm
- Material: cold rolled steel, nickel plated
- Range of door thickness: 15-28mm


T28系列内置阻尼自动铰链(两段力)功能图 T28 Installation dimensions (Two way)

D: 盖位计算值表 Overlay
A: 间隙位计算值表 Gap



T28A 全盖 Full overlay

$$H = 14 + K - D$$




H \ D	K				
	3	4	5	6	7
0	17	18	19	20	21
2	15	16	17	18	19



T28B 半盖 Half overlay

$$H = 4.5 + K - D$$




H \ D	K				
	3	4	5	6	7
0	7.5	8.5	9.5	10.5	11.5
2	5.5	6.5	7.5	8.5	9.5




T28C 内嵌 Insert

$$H = -4 + K + A$$



H \ A	K				
	3	4	5	6	7
0	1	0	-1	-2	-3
2	3	2	1	0	-1

铰杯种类 Hinge cup types

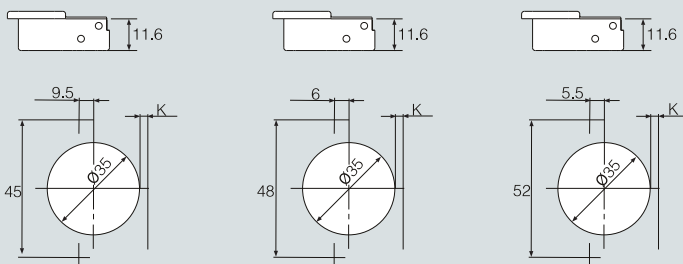

可配底座 Plate

序号 No	名称 Item no.	H值 H Value	孔型/安装尺寸L Hole type/Mounting dimension	类型 type
1	FT15	H=0	四孔four holes/37mm	普通 Normal
2				
3				

安装尺寸L(Mounting dimension L)

